


E-6	MODELS	ANSI NO	TYPE	FUNCTION DESCRIPTION
-----	--------	---------	------	----------------------

E5110-E5210 **E5130-E5230** **E5150-E5250**


RIM SVR CVR

Outside Inside Outside Inside Outside Inside


Note: Exit Device Functions are Determined by Trim
Please See Page 16

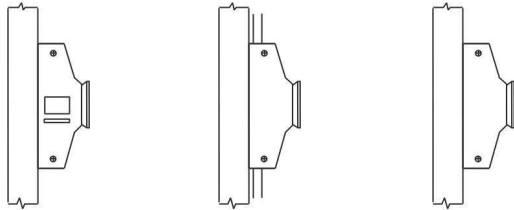


01 Exit Only Exit Only No Outside Trim
Free Egress Inside By Touch Bar

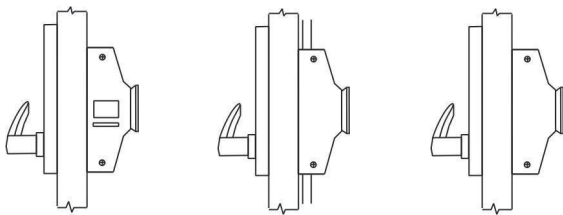

14 Passage Trim From Outside Trim Always Unlocked
Turning Lever Allows Entry
Free Egress Inside By Touch Bar

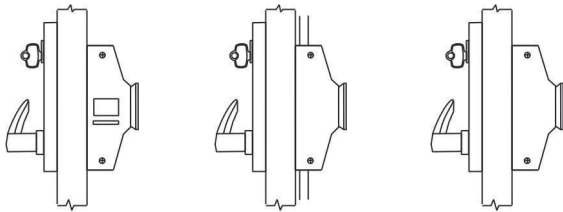

08 Classroom Trim Outside Locked or Unlocked By Key
Free Egress Inside By Touch Bar

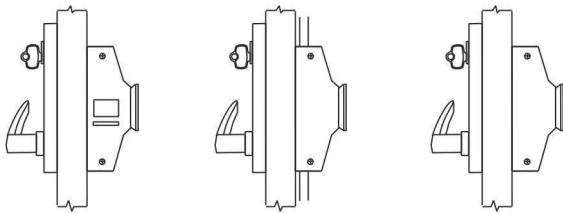

09 Storeroom Outside Trim Always Locked
(Outside Lever Active)
Key From Outside Allows Entry
Free Egress Inside By Touch Bar

Minimum Door Width For Exit Devices

Model	Description	Door Size	Minimum Door	Maximum Cut	Touch Bar
E5110	Rim Device Non Fire	36" (914mm)	30" (762mm)	6" (152mm)	18" (457mm)
E5110F	Rim Device Fire Rated	36" (914mm)	27" (686mm)	9" (229mm)	18" (457mm)
E5130	SVR Device Non Fire	36" (914mm)	30" (762mm)	6" (152mm)	18" (457mm)
E5130F	SVR Device Fire Rated	36" (914mm)	27" (686mm)	9" (229mm)	18" (457mm)
E5110	Rim Device Non Fire	48" (1219mm)	34" (864mm)	14" (356mm)	22" (559mm)
E5110F	Rim Device Fire Rated	48" (1219mm)	33" (838mm)	15" (381mm)	22" (559mm)
E5130	SVR Device Non Fire	48" (1219mm)	34" (864mm)	14" (356mm)	22" (559mm)
E5130F	SVR Device Fire Rated	48" (1219mm)	33" (838mm)	15" (381mm)	22" (559mm)