


# Tubular Locks



Model No T-2 (ANSI No)	Description	Function	Outside / Inside
<b>T301</b>	Dummy Trim Inside	<ul style="list-style-type: none"> <li>• Surface Mounted Trim</li> <li>• Lever Active</li> </ul>	
<b>T303</b>	Dummy Trim Outside	<ul style="list-style-type: none"> <li>• Surface Mounted Trim</li> <li>• Lever Active</li> </ul>	
<b>T302</b>	Full Dummy Trim	<ul style="list-style-type: none"> <li>• Through Mounted Trim</li> <li>• Both Levers Active</li> </ul>	
<b>T310 (F75)</b>	Passage Set	<ul style="list-style-type: none"> <li>• Latchbolt By Lever Either Side</li> <li>• Both Sides Always Free</li> </ul>	
<b>T340 (F76)</b>	Privacy Set Locking	<ul style="list-style-type: none"> <li>• Latchbolt By Lever Either Side Unless Outside Locked By Push Button Inside</li> <li>• Outside Unlocked By Turning Inside Lever Closing Door, or Emergency Key From Outside</li> </ul>	
<b>T325 (F111)</b>	Communicating Lock	<ul style="list-style-type: none"> <li>• Blank Plate on Outside</li> <li>• Inside Lever Always Free</li> </ul>	

### How To Order

#### Tubular Locksets

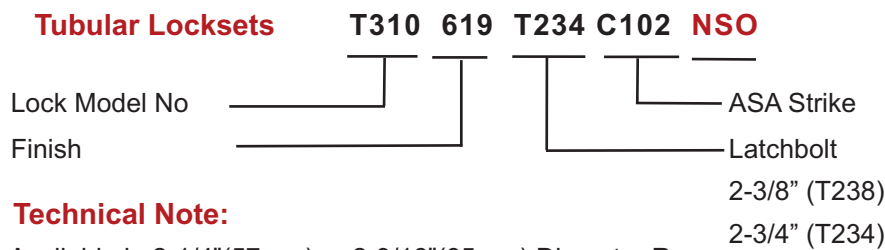

### NSO: Non Standard Options

- Door Thickness Over 1-3/4"(44.5mm)
- Non Standard Strike
- (T275) T Strike 2 3/4"
- (T225) Full Lip Strike
- Tactile Coat Inside
- Tactile Coat Outside
- Knurled Knob/Lever

### Technical Note:

Available in 2-1/4"(57mm) or 2-9/16"(65mm) Diameter Rose  
Please specify when ordering