


MODEL No.	Description	I-11
-----------	-------------	------

E4W 4 wire through hinge

E6W 6 wire through hinge

E8W 8 wire through hinge

- Provides power transfer from frame to door
- Used with electric locks, panic devices or electric strikes
- Available with 4, 6 or 8 wires.
- Concealed electric through wire 50 Volts AC/DC @ 1 amp
- UL Listed

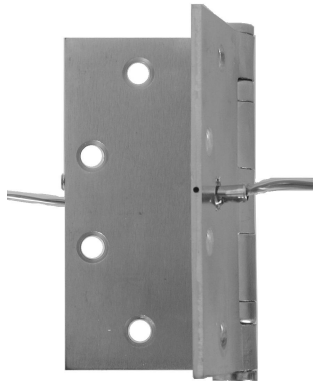

Brookline can modify any standard or heavy weight ball bearing hinge in our catalog for power transfer.

To order select the hinge you require from our hinge section and add the suffix along with the desired finish.

Example TS4545BB - E4W - 32D

THROUGH WIRE HINGE WITHOUT MONITORING


- Note electric hinge must be placed at the center position only

M4W monitoring x 4 wires

M6W monitoring x 6 wires

M8W monitoring x 8 wires

- Provides power transfer from frame to door
- Monitors opening with set of dry contacts
- Used with electric locks, panic devices or electric strikes
- Available with 4, 6 or 8 wires.
- Concealed electric monitor 30VDC @ .5 amps
- Concealed electric through wire 50 Volts AC/DC @ 1 amp
- UL Listed

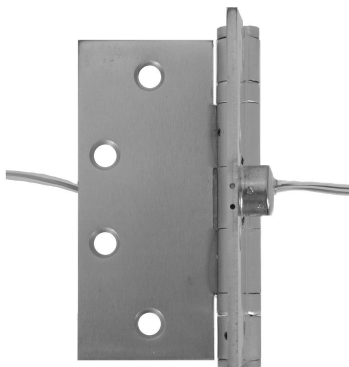

Brookline can modify any standard or heavy weight ball bearing hinge in our catalog for power transfer with monitoring.

To order select the hinge you require from our hinge section and add the suffix along with the desired finish.

Example TS4545BB - M4W - 32D

THROUGH WIRE HINGE WITH MONITORING

- Note electric hinge must be placed at the center position only